


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling of motor (To be maintained by user)

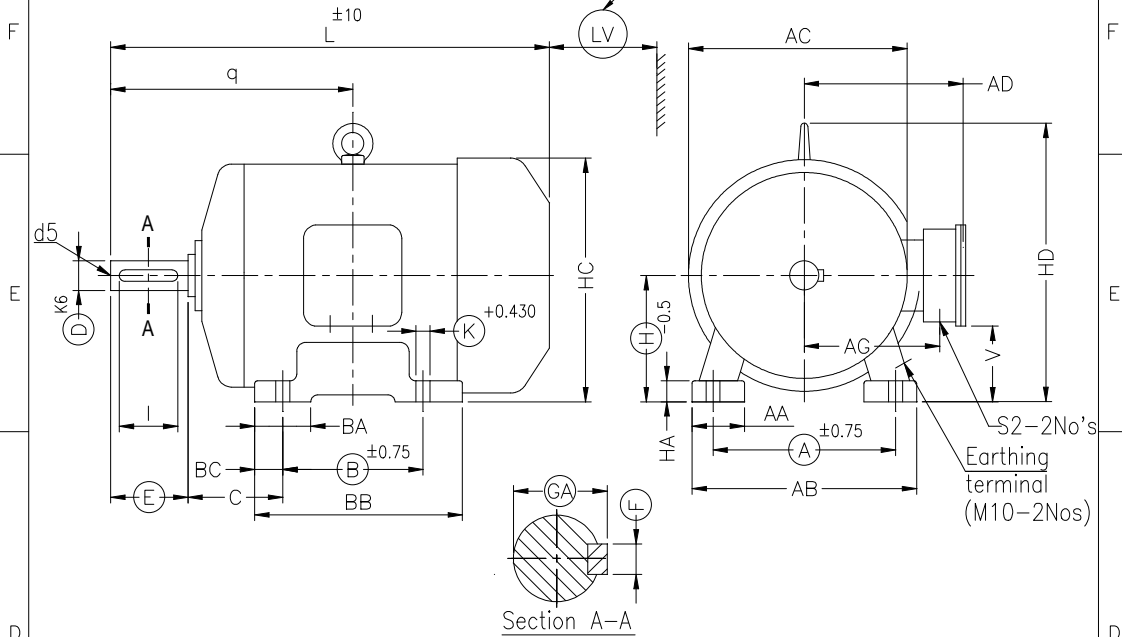

Section A-A

IEC Frame	Pole	Fixing					General										
		A	B	C	H	K	AB	BB	AA	BA	BC	HA	HC	HD	AD	L	LV
132S	2,4 6&8	216	140	89	132	12	256	180	64	50	23	17	262	308	231	512	50


T Box				Shaft						
AC	V	q	AG	S2	D	E	F	GA	I	d5
260	104	239	178	1" B.S.C.	38	80	10	41	70	M12

Notes:-

- 1) Terminal box can be rotated in 360 deg in steps of 90 deg.
- 2) Ringed dimensions are as per IS:1231/IEC60072

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

NAME	DATE	TITLE: <b>DIMENSION DRAWING</b> 3PH SQUIRREL CAGE, TEFC (FOOT MOUNTED) INDUCTION MOTOR (BRAKE MOTOR)
DRN	YCJ 07.04.2015	
CHD		
APPD		



DRG. No: **B13S432RC**

4

3

2

1